

Description


The BAV116 is a full bore (2-1/2" is reduced bore) straight through hydrant floating ball valve. Manufactured as standard in Bronze to give long service life on seawater applications.

In conformance with the Pressure Equipment Directive 2014/68/EU

Standard Range,
Sizes: 1-1/2" to 2-1/2"
Connections: PN16 with IHC male or female connectors.

Features

Anti-static / Anti blowout stem
Solid Ball

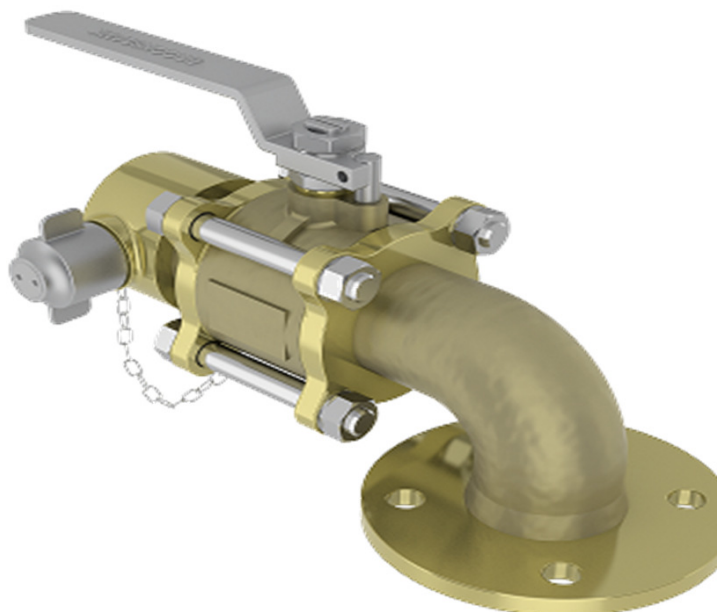

Options

Male or female IHC connection
Locking facility
Extended stems (insulation allowance)

Materials

Regularly manufactured in a full range of materials including:

Nickel Aluminium Bronze – ASTM B148
Nickel Aluminium Bronze - DS02 747 Part 3
Gunmetal – DS02 830 Part 1
Bronze – ASTM B61/B62
Brass – HTB1
Titanium – ASTM B367
Hastelloy®
Monel®

Other materials available on request

Specifications

Designed specifically for Naval Applications.
PED Conformity
BS4504, BS5351 & BS336

Dimensions

PN16

VALVE SIZE		mm					WEIGHT kg	Drg IHC Female	Drg IHC Male
INCH	mm	A NB Pipe	B	C	D	E			
1 1/2"	40	40	150	186	160	188	8.5	1876	1879
2"	50	72	165	207	203	220	13	1877	1880
2 1/2"	65	72	185	207	203	230	13.5	1878	1881

